

FD612GD-R460


2GE+1POTS+2WIFI XPON ONU



Brief Views

FD612GD-R460 is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with our company FD16 series GPON OLT or FD11 / 12 series EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet, WIFI and VOIP services based on GPON and EPON technology.



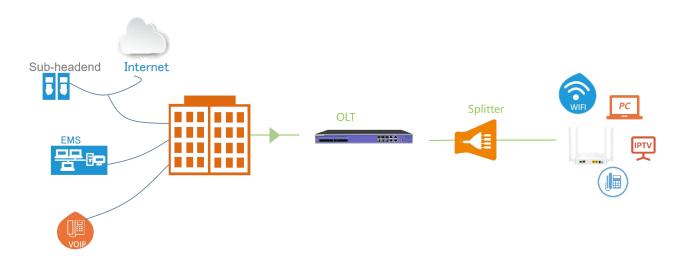

Functional Feature


- In compliant with IEEE802.3ah and ITU T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk

- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control
- Single-fiber access, provides internet, WIFI ,VOIP multiple service.

Product Interface and LED



PON Port TEL Port LAN Ports Switch



LED Definitions

| | Indicator | Description |
|------|---------------------------|---|
| PWR | Power status | On: The ONT is power on; Off: The ONT is Power off; |
| PON | ONT Register | On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input; |
| LOS | PON optical signals | On: Optical power lower than receiver sensitivity; Off: Optical in normal; |
| LAN | LAN port status | On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up; |
| INT | Internet status indicator | On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal. |
| WIFI | WIFI | Blinking :Data is being transmitted On:WIFI function Opens |
| TEL | Telephone port status | On:The connection between the TEL port and the voice server has been set up Blinking:The voice service of the TEL port is established; Off:The connection between the TEL port and the voice server is not set up. |

Product Specification

| Mechanics | |
|------------|------------------------------|
| Dimensions | 214mm(L)*139.5mm(W)*32mm (H) |
| Weight | About 0.239kg |

| Hardware | | | |
|-----------------|-----------------------|---|-------------------|
| User Port (LAN) | | RJ-45 connector | |
| | | 2 *10/100/1000Mbps adapt | ive Ethernet port |
| | | Full/half duplex | |
| | | Auto MDI/MDI-X | |
| Indicators | | PWR / PON / LOS / LAN / INT | / TEL / WIFI |
| | PON Mode | EPON: 1000BASE-PX20+ syr | nmetric |
| | | GPON: FSAN G.984.2 stand | ard,Class B+ |
| DOM Davit | PON Rate | EPON: 1.25Gbps downstrea | am/upstream |
| PON Port | | GPON: 2.488Gbps/1.244Gbps downstream/upstream | |
| | Wavelength | Transmit: 1310nm | Receiver: 1490nm |
| | Receiving sensitivity | EPON: -27dBm GPON: -28dBm | |

FD612GD-R460 Product Datasheet

| Saturated power | EPON: -3dBm | GPON: -8dBm |
|--------------------|-------------|------------------------|
| Transmitting power | EPON:0~4dBm | GPON: $0.5 \sim 5 dBm$ |

| User Port(POTS) | |
|---|--|
| RJ-11 connector | |
| 1*accounts | |
| SIP protocol | |
| TDMF | |
| G711U/G711A/G729/G722 encoding and decoding | |

WIFI performance parameter

| IEEE802.11b/g/n(2.4G) | |
|-------------------------|--|
| IEEE802.11a/n/ac(5G) | |
| Max rate: 300M(2.4G) | |
| Max rate: 867Mbps(5G) | |
| MAX TX power 2.4G:17dBm | |
| MAX TX power 5G:17dBm | |

| Environment | | |
|---------------------|----------------------------|--|
| Working temperature | 0 to 40° C | |
| Operating humidity | 10% ~ 90% (Non-condensing) | |

| Power | | |
|--|-------|--|
| External 12VDC/1.5A power supply adapter | | |
| Power consumption | ≪9.7W | |

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.

FD612GD-R460 Product Datasheet