

CR6150

**AX1500**

**Dual Band Gigabit  
Wi-Fi 6 Mesh Router**





**CR6150 Wi-Fi 6 Mesh Router** is a new generation SOHO high-performance wifi6 router. It adopts an Realtek chip, has 2.4g 2X2 and 5G 2X2 omnidirectional multi-band high-gain antennas.

The CR6150 is a gigabit Wi-Fi6 router designed for home users looking for a performance experience. Mesh networking is supported, which can easily solve the problem of Wi-Fi coverage of oversized houses. concurrent speed up to 1500Mbps (5GHz: 1201Mbps, 2.4GHz: 300Mbps), at the same time equipped with 7dbi high-gain antenna, Wi-Fi through the wall stronger, longer transmission distance. OFDMA+MU-MIMO technology is adopted to meet the needs of more devices to access the Internet at the same time, which significantly improves the transmission efficiency and greatly reduces the delay.



# Main Features



**Dual-band WiFi**



**IPV6**



**WAN/LAN adaptive**



**Terminal Management**



**Mesh**





**Port Forwarding**




**WEB UI 3.0**



**guest Wi-Fi**

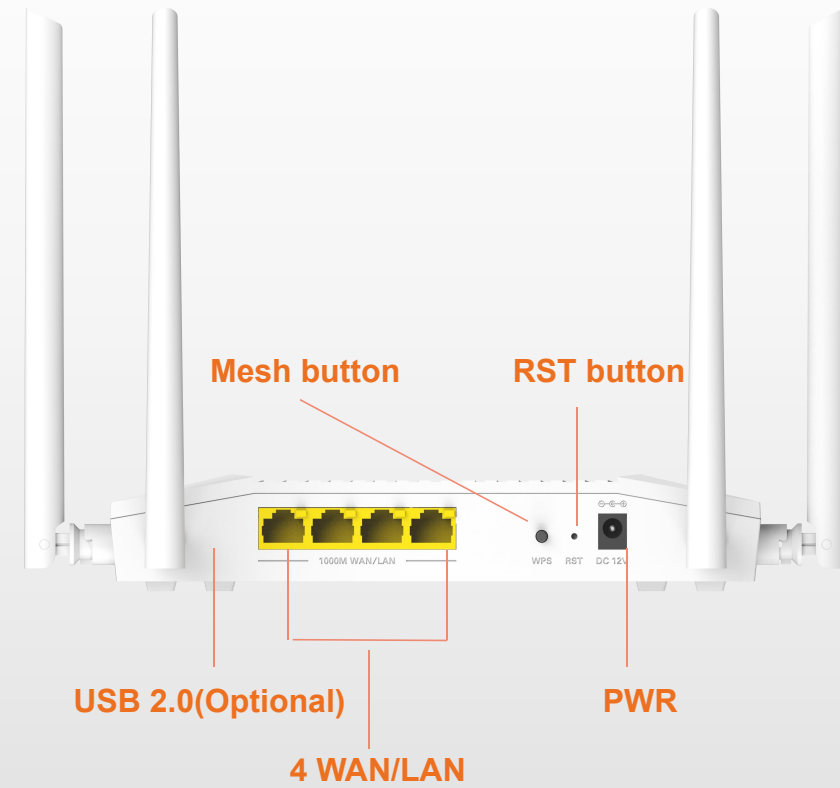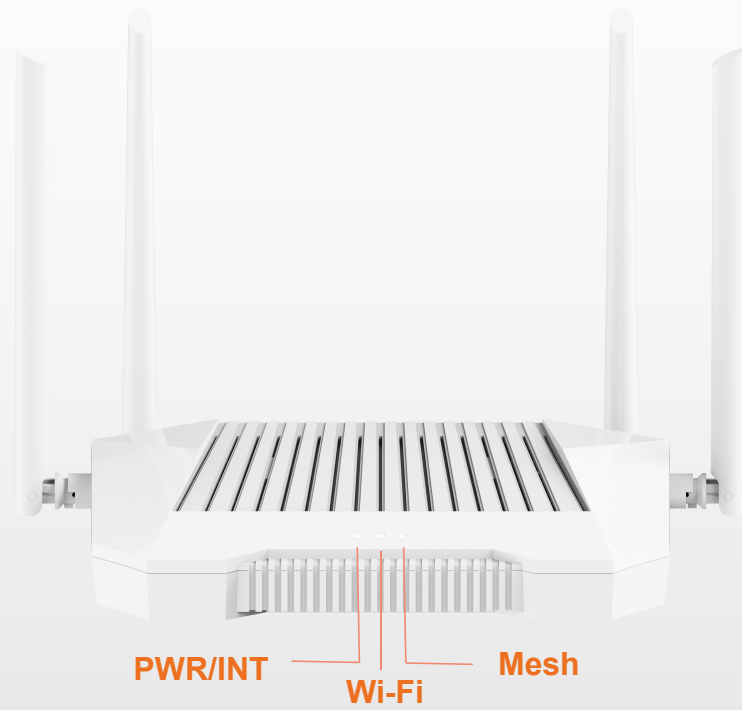

# Application scenario

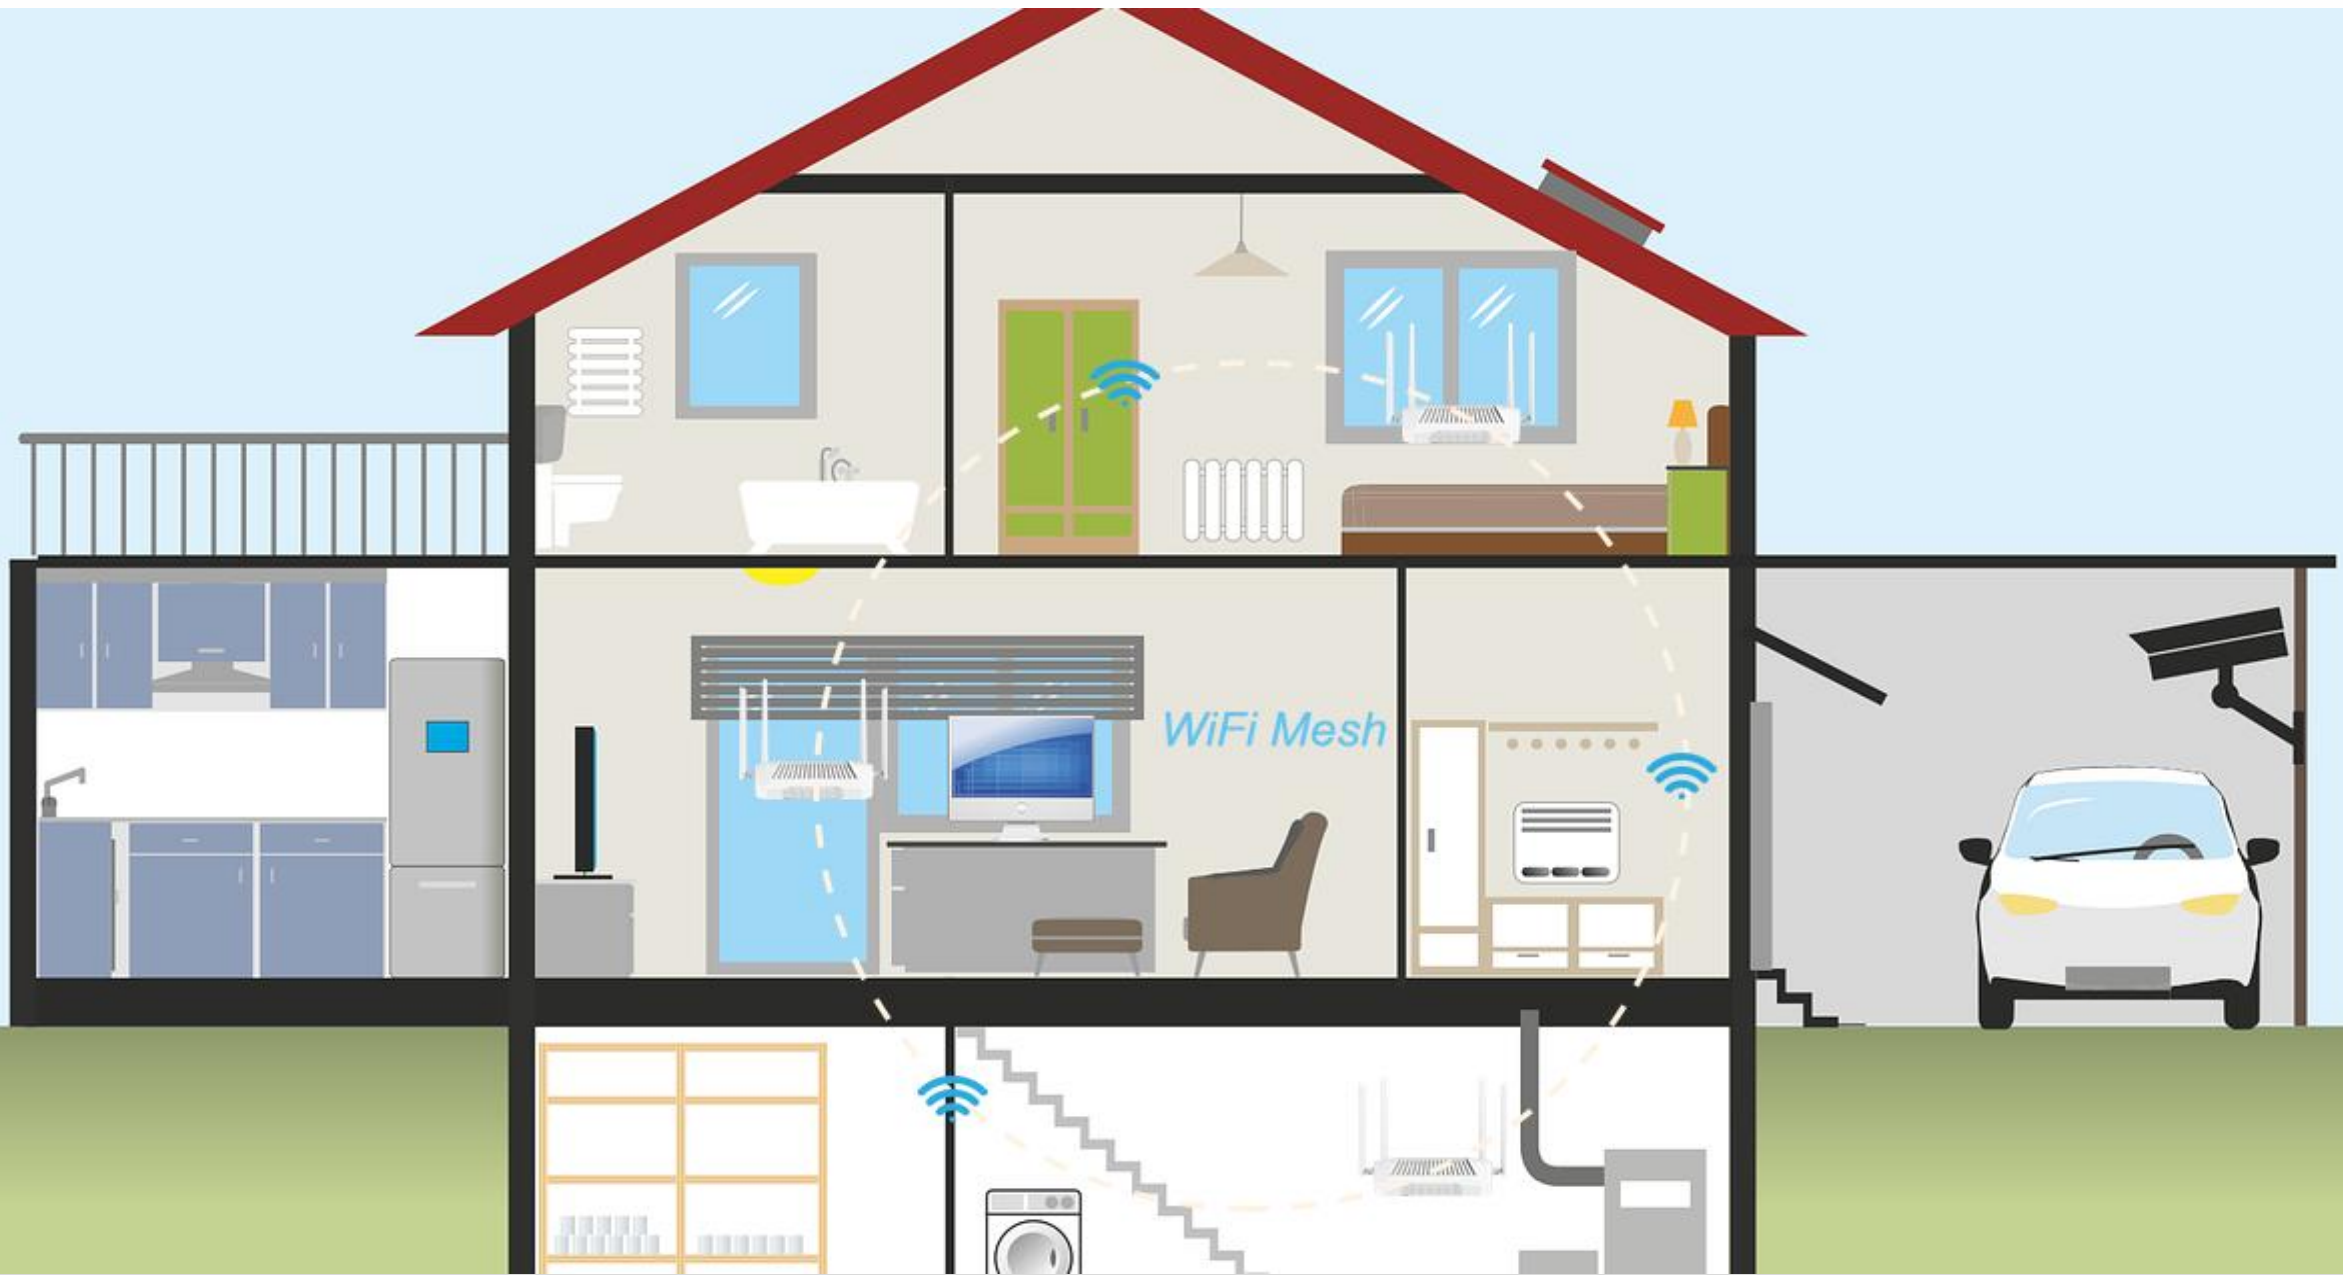

# Hardware Features



Name	AX1500 Wireless Router	
Model	CR6150	
Chip	RTL8197H+RTL8832BR	
Memory /Storage	1Gb/1Gb	
Wi-Fi Antennas	2×2.4GHz 2×5GHz External 7dBi Gain	
Protocol	IEEE 802.11a/b/g/n/ac/ax	
Wi-Fi Speed	2.4G Wi-Fi (Speed 300Mbps) 5G Wi-Fi (Speed1201Mbps)	
LED	Power/INT	Green: Successfully connected to the network Blinking:Power is normal but the network connection fails Off: Power off
	Wi-Fi	Green: Wi-Fi up Off: Wi-Fi down
	Mesh	Green:Successful Mesh networking Blinking:Building a Mesh network Off:The Mesh network is not formed

Interface	WAN/LAN	4 RJ45 port ,10/100/1000Mbps
	Mesh/WPS	Button
	Reset	Button
Transmit Power	USB 2.0	Optional
	2.4G	23dBm
	5G	21dBm
Power Supply		DC12V/1A Adapter
Power Consumption		<12W
Dimension		
Operating Temperature -10 ~ 50℃		
Storage Temperature		-30 ~ 70℃

# Software Features



IP Protocols	IPv4/IPv6
Wi-Fi6 Tech	Long OFDM Symbol OFDMA DL/UL MU-MIMO TWT BSS Coloring WPA3
WAN Mode	Dynamic IP Static IP PPPoE
Security	Firewall Port Mapping DMZ ALG Terminal Management Parental Control
System Service	Network Time Software Upgrade Backup and Restore System Logs

Guest Wi-Fi	2.4G/5G Guest SSID
Management	WEB
Network Settings	Local Area Network (LAN) Settings Wide Area Network (WAN) Port Settings
Mesh	EasyMesh

Product Model	Product Description
CR6150	4*10/100/1000Base-Tx Ethernet WAN/LAN port, external 4*7dBi antennas, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac/ax protocol, wireless transmission rate 1500Mbps, 12VDC power supply.

## Contact Us

Shenzhen C-Data Technology Co.,Ltd.  
Address: 2nd Floor, Building A4, Nanshan Zhiyuan, 1001 Xueyuan Avenue,  
Nanshan District, Shenzhen, Guangdong, China, 518055

Tel: +86-755-26014509/4710/4711  
Fax: +86-755-26014506  
Email: [marketing@cdatatec.com](mailto:marketing@cdatatec.com)  
Website: [www.cdatatec.com](http://www.cdatatec.com)